

3000 D

3010 D

Dunstabzugshaube

Afzuigkap

Hotte aspirante

Cooker Hood

Montage- und Gebrauchsanweisung

Installatie- en gebruiksaanwijzing

Manuel de montage et d'utilisation

Operating and Installation Instructions

# Contents

<b>Safety warnings</b>	<b>57</b>
for user	
for kitchen unit installer	
<b>Introduction</b>	<b>59</b>
Extractor version	
Filter version	
<b>Hood operation</b>	<b>60</b>
<b>Maintenance and care</b>	<b>61</b>
Metal grease filter	
Open the metal grease filter	
Carbon filter	62
Changing the light bulb	63
Cleaning	64
Special accessories	
Technical assistance service	
Guarantee conditions	65
Service	
<b>Technic Details</b>	<b>67</b>
<b>Installation</b>	<b>68</b>
Electrical connection	
Safety warnings for the electrician	
Wall unit mounting	69



## Safety warnings

### for user

- Always cover lighted elements, to prevent excess heat from damaging the appliance. In the case of oil, gas and coal fired cookers it is essential to avoid open flames.
- Also, when frying, keep the deep frying pan on the cooker top/cooker under careful control.
- The hot oil in the frying pan might ignite due to overheating.
- The risk of self-ignition increases when the oil being used is dirty.
- It is extremely important to note that overheating can cause a fire.
- **Never carry out any flambé cooking under the hood.**
- **Always disconnect the unit from the power supply before carrying out any work on the hood, including replacing the light bulb** (take the cartridge fuse out of the fuse holder or switch off the automatic circuit breaker).
- **It is very important to clean the hood and replace the filter at the recommended intervals. Failure to do so could cause grease deposits to build up, causing a fire hazard.**

### for kitchen unit installer

- When used as an extractor unit, the hood must be fitted with a 150mm diameter hose.  
Falls ein Abluftrohr in Wand oder Dach mit einem Durchmesser von 125 mm schon besteht, kann der mitgelieferte Reduzierstutzen, 150/125 mm, verwendet werden. Zusammen mit dem Reduzierstutzen kann der Ablaufschlauch 125 montiert werden.
- **When installing the hood, make sure you respect the following minimum distance from the top edge of the cooking hob/ring surfaces:**


<b>electric cookers</b>	<b>600 mm</b>
<b>gas cookers</b>	<b>650 mm</b>
<b>coal and oil cookers</b>	<b>700 mm min.</b>

- The national decree on fuel-burning systems specifies a maximum depression of 0.04 bar in such rooms.
- The air outlet must not be connected to chimney flues or combustion gas ducts. The air outlet must under no circumstances be connected to ventilation ducts for rooms in which fuel-burning appliances are installed.
- It is advisable to apply for authorization from the relevant controlling authority when connecting the outlet to an unused chimney flue or combustion gas duct.  
The air outlet installation must comply with the regulations laid down by the relevant authorities.
- When the unit is used in its extractor version, a sufficiently large ventilation hole must be provided, with dimensions that are approximately the same as the outlet hole.
- National and regional building regulations impose a number of restrictions on using hoods and fuel-burning appliances connected to a chimney, such as coal or oil room-heaters and gas fires, in the same room.
- Hoods can only be used safely with appliances connected to a chimney if the room and/or flat (air/environment combination) is ventilated from outside using a suitable ventilation hole approximately 500-600 cm<sup>2</sup> large to avoid the possibility of a depression being created during operation of the hood.
- If you have any doubts, contact the relevant controlling authority or building inspector's office.
- Since the rule for rooms with fuel burning appliances is "outlet hole of the same size as the ventilation hole", a hole of 500-600 cm<sup>2</sup>, which is to say a larger hole, could reduce the performance of the extractor hood.
- If the hood is used in its filtering function, it will operate simply and safely in the above conditions without the need for any of the aforementioned measures.
- When the hood is used in its extractor function, the following rules must be followed to obtain optimal operation:
  - short and straight outlet hose
  - keep bends in outlet hose to a minimum
  - never install the hoses with an acute angle, they must always follow a gentle curve only
  - keep the hose as large as possible (150 mm Ø min.).
- Failure to observe these basic rules will drastically reduce the performance and increase the noise levels of the extractor hood.

# Introduction

## Extractor version


- The hood is supplied in the extractor version, but it can also be used in the filter version by inserting an activated charcoal filter (special accessory).
- To do this, use an original AEG activated charcoal filter (see Special accessories).
- The air is discharged to the outside through a pipe, which must be fitted to connection flange **A**. **Fig. 1**.
- For the extractor version this pipe must have a diameter of 150 mm. Should there already be a pipe of diameter 125 mm that ducts to the outside through the walls or roof, it is possible to use the 150/125 mm reduction flange provided. In this case the hood will be slightly more noisy.



**Fig. 1**

## Filter version

- The air is filtered through an activated charcoal filter and returned to the kitchen through the top grill of the outlet pipe.
- When the hood is used in the filter version it must be fitted with an original AEG KF20 activated charcoal filter (see Special accessories).
- Fix the deflector using two screws  $\varnothing 3.5 \times 6.5$  mm. Fig. 2.
- Optionally, the position of the chimney elements can be changed. When using the hood in the filter version the chimney must be fixed at the top, with the air outlet grill at the side.

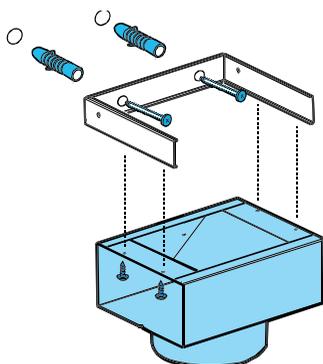

**Fig. 2**

## Hood Operation

- Best results are obtained by using a low speed for normal conditions and high speed when odours are more concentrated. Turn the hood on a few minutes before you start cooking then you will get an underpressure in the kitchen. It should be left on after cooking for about 15 minutes or until all odours have disappeared. The control switches are located on the unit's front panel:

**A:** Main switch, hood on/off.

**B:** Start and choice of motor speed 1-2-3-1-2.....

**C:** Indicates speed 1 (LED).

**D:** Indicates speed 2 (LED).

**E:** Indicates speed 3 (LED).

**F:** Indicates Intensive speed (LED).


**G:** Intensive speed on/off. The Intensive speed runs for 5 minutes:

- If the hood is on when the Intensive speed is activated, the hood revert to previous speed after 5 minutes.
- If the hood is off when the Intensive speed is activated, the hood will automaticly be turned off after 5 minutes.

To interrupt the Intensive speed, press button A or B.

**H:** Light off.

**I:** Light on.

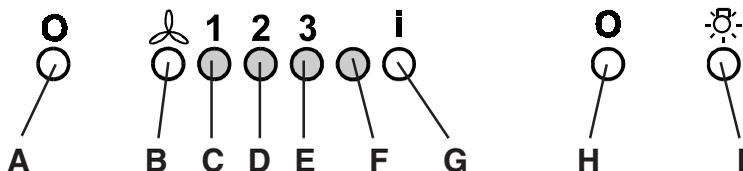

Should the hood or the controls fail to operate: disconnect the power supply for at least 5 seconds, then turn the hood back on again.

# Maintenance and care

- The hood must always be disconnected from the mains power supply before beginning any maintenance work.

## Metal grease filter


- The purpose of the grease filters is to aspirate grease particles which form during cooking and it **must** always be used, either in the external evacuation or internal recycling function.  
Attention: the metal grease filters must be removed and washed, either by hand or in the dishwasher, every four weeks.

## Open the metal grease filter

- First, push the metal grease filter stop backwards, then extract the filter, pulling downwards. **Fig. 3.**

## Hand washing

Soak grease filters for about one hour in hot water with a grease-loosening cleaner, then rinse off thoroughly with hot water. Repeat the process if necessary. Refit the grease filters when it are dry.



**Afb. 3**

## Dishwasher machine

Place grease filters in dish washer. Select most powerful washing programme and highest temperature, at least 65°C. Repeat the process. Refit the grease filters when it are dry. When washing the metal grease filter in the dishwasher a slight discoloration of the filter can occur, this does not have any impact on its performance.

- Clean the inner housing using a hot detergent solution only (never use caustic detergents, abrasive powders or brushes).

## Carbon filter

- The activated carbon filter should only be used if you want to use the hood in its filtering function.
- To do this you will need an original AEG activated carbon filter (see special accessories).

- **Cleaning/replacing the carbon filter**


Unlike other carbon filters, the **LONGLIFE** carbon filter can be cleaned and reactivated. At normal use the filter should be cleaned every second month. The best way to clean the filter is in the dishwasher. Use normal detergent and choose the highest temperature (65° C). Wash the filter separately so that no food parts gets stuck on the filter and later causes bad odours. To reactivate the carbon, the filter should be dried in an oven for 10 minutes with a temperature of maximum 100° C.

After approximately three years of use, the carbon filter should be replaced with a new, as the odour reduction capacity will be reduced.

- **Mounting**

Remove the frame **i** which supports the filter **h** by unscrewing it from the hood **g** **Fig.. 4**. Insert the coal mattress inside the frame and put all parts back in their place.

- **To dismantle** proceed in reverse order.
- Always specify the hood model code number and serial number when ordering replacement filters. This information is shown on the registration plate located on the inside of the unit.
- The activated carbon filter can be ordered from the AEG technical assistance service.

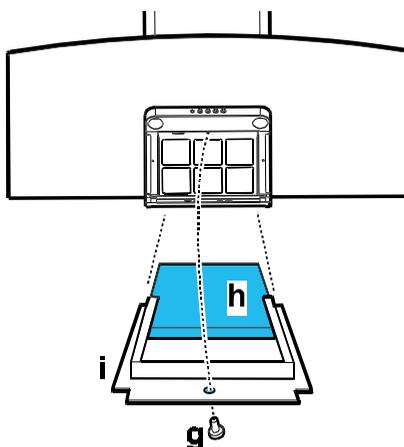

Afb. 4




## Warning

- Failure to observe the instructions on cleaning the unit and changing the filters will cause a fire hazard. You are therefore strongly recommended to follow these instructions.
- The manufacturer declines all responsibility for any damage to the motor or any fire damage linked to inappropriate maintenance or failure to observe the above safety recommendations.

## Changing the light bulb

---

- Disconnect the cooker hood from the main supply.
- Remove the lamp cover, use a screw driver as a lever. **Fig. 5.**
- Replace the old bulb with a new one of the same type.
- Remount the lamp cover.
- If the light does not come on, make sure the bulb has been inserted in correctly before contacting the technical assistance service.

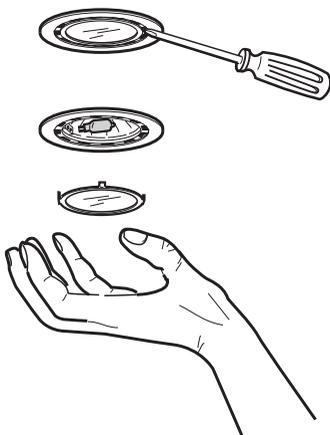

**Fig. 5**

## Cleaning

- Warning: always disconnect the hood from the mains power supply before cleaning it.  
Never insert pointed objects in the motor's protective grid.
- Wash the outside surfaces using a delicate detergent solution.  
Never use caustic detergents or abrasive brushes or powders.
- Only ever clean the switch panel and filter grille using a damp cloth and delicate detergents.
- It is extremely important to clean the unit and change the filters at the recommended intervals. Failure to do so will cause grease deposits to build up that could constitute a fire hazard.

## Special accessories

Carbon filter KF20

E-Nr. 942 120 600

## Technical assistance service

You are welcome to telephone our technical assistance service (see list of technical assistance centres) whenever you need information or in the unlikely event of a fault.

When calling, please be ready to specify:

- 1. The model code number**
- 2. The serial number (E-Nr.)**
- 3. The manufacturing number (F-Nr.)**

**This information is shown on the registration plate inside the unit behind the grease filter.**

We reserve the right to change specifications and colours as a result of our policy of continuing technological development.

---

## **Guarantee conditions**

### **Guarantee Conditions**

AEG offer the following guarantee to the first purchaser of this appliance.

1. The guarantee is valid for 12 months commencing when the appliance is handed over to the first retail purchaser, which must be verified by purchase invoice or similar documentation. The guarantee does not cover commercial use.
2. The guarantee covers all parts or components which fail due to faulty workmanship or faulty materials. The guarantee does not cover appliances where defects or poor performance are due to misuse, accidental damage, neglect, faulty installation, unauthorised modification or attempted repair, commercial use or failure to observe requirements and recommendations set out in the instruction book. This guarantee does not cover such parts as light bulbs, removable glass-ware or plastic.
3. Should guarantee repairs be necessary the purchaser must inform the nearest customer service office (manufacturer's service or authorised agent). AEG reserves the right to stipulate the place of the repair (i.e. the customer's home, place of installation or AEG workshop).
4. The guarantee or free replacement includes both labour and materials.
5. Repairs carried out under guarantee do not extend the guarantee period for the appliance. Parts removed during guarantee repairs become the property of AEG.
6. The purchaser's statutory rights are not affected by this guarantee.

### **European Guarantee**

If you should move to another country within Europe then your guarantee moves with you to your new home subject to the following qualifications:

- The guarantee starts from the date you first purchased your product.
- The guarantee is for the same period and to the same extent for labour and parts as exist in the new country of use for this brand or range of products.
- This guarantee relates to you and cannot be transferred to another user.
- Your new home is within the European Community (EC) or European Free Trade Area.
- The product is installed and used in accordance with our instructions and is only used domestically, i.e. a normal household.
- The product is installed taking into account regulations in your new country.

Before you move please contact your nearest Customer Care Centre, listed below, to give them details of your new home. They will then ensure that the local Service Organisation is aware of your move and able to look after you and your appliances.

France	Senlis	+33 (0) 44 62 29 29
Germany	Nürnberg	+49 (0) 911 323 2600
Italy	Pordenone	+39 (0) 1678 47053
Sweden	Stockholm	+46 (0) 8 738 7910
UK	Slough	+44 (0) 1753 219899

# Technic Details

---

Dimensions (Extractor version):

---

Height x Width x Depth (in cm) 660-1120 x 898X x 500

---

Dimensions (Filter version):

---

Height x Width x Depth (in cm) 755-1220 x 898 x 500

---

---

Maximum absorbed power: 210 W

---

Motor absorption: 1 x 170 W

---

Lighting: 2 x20 W

---

---

Length of the cable: 150 cm

---

Fan powers (speed), speed in compliance with DIN 44971

(Extractor version) Speed:

---

1 171 m<sup>3</sup>/h

---

2 268 m<sup>3</sup>/h

---

3 291 m<sup>3</sup>/h

---

i 435 m<sup>3</sup>/h

---

(Filter version) Speed:

---

1 118 m<sup>3</sup>/h

---

2 176 m<sup>3</sup>/h

---

3 201 m<sup>3</sup>/h

---

i 267 m<sup>3</sup>/h

---

Flange 150 mm Ø

---

# Electrical connection

## Safety warnings for the electrician

Before connecting the appliance to the power supply, check that the voltage indicated on the rating plate corresponds to the mains power supply available. Appliances fitted with a plug can be connected to any standard power socket within easy access.

Should it be necessary to provide a fixed connection, the hood must only be installed by an electrician authorised by the local electricity board. When installing, an omnipolar disconnector with a distance of at least 3 mm between contacts must be provided.

This disconnector may be for example a switch, fuses (plug fuses must be removed from the fuse box, fault current switches and remote switches with a distance of over 3 mm between contacts.

The manufacture declines all responsibility for malfunctions resulting from failure to comply with the above instructions.

If the power socket is applied directly above the hood this gives two advantages:

1. the socket is not visible.
2. the appliance can be disconnected at need merely by removing the plug.

### Electrical connection

220-240 V – by means of fixed power cable with plug.

(Fixed connection of the appliance must only be carried out by an authorised electrician.)

## Wall unit mounting - Fig. 6

- First decide which functioning version is better for you.  
If you decide to use the hood in exhausting version we suggest to position the upper section of the chimney so that the outlet slots are not visible once installation has ended, on the contrary if is decided to use the hood in recycling version BE SURE that the side with slots is up (see also A-B-C sequence on on Fig. 6).
- Insert the frame, that holds controls, grease filter and lamps, in the motor housing using proper rails and fix each other with two 3x9 screws (1-2-3).
- Sign the wall with a center line, this will aid mounting procedure (4), position the template so that the mid line printed on the template matches with the center line previously signed, the lower side of the template corresponds to the lower side of the hood once mounted (5).
- Drill two holes Ø 8mm and fix the support bracket with two wall plugs and screws (6).
- Hang the hood (7) adjust its position (8-9) and from the inside of the hood sign one point for definitive fixing (10), remove the hood and drill an hole Ø 8mm (11), fit a wall plugs, hang the hood again and fix it definitively with a screw (12).
- Drill two holes Ø 8mm on the upper side close to the ceiling (13), fit two wall plugs and fix the chimney support with two screws (14).  
In case the hood is to be used in **Recycling version**, mount the deflector **F** on the chimney support with four screws 2,9x6,5 and fit an exhausting pipe (15) to connect deflector to the outlet hole **B** of the hood.  
In case the hood is to be used in exhausting version, then the deflector must not be mounted and fit an exhausting pipe (15) to connect outlet hole **B** of the hood to the outside.
- Make electrical connection (16), but leave the hood disconnected from the home general electric panel.
- Connect lamps and control panel to the motor housing (17).
- Insert the vapour catcher on the motor housing and fix it with four screws M4x35 (18).  
Model 3010D has an additional part that can be mounted to the first part fixed on step 18 before or after this step, choose the convenience, fixing between this two parts must be done with four screws.
- Fix the chimney first up (19a) to the chimney support (19b), then on the bottom (20a) to the upper side of the frame (20b) using four screws 2,9x6,5.
- Connect the hood the the home general electric panel and check if the hood work properly.

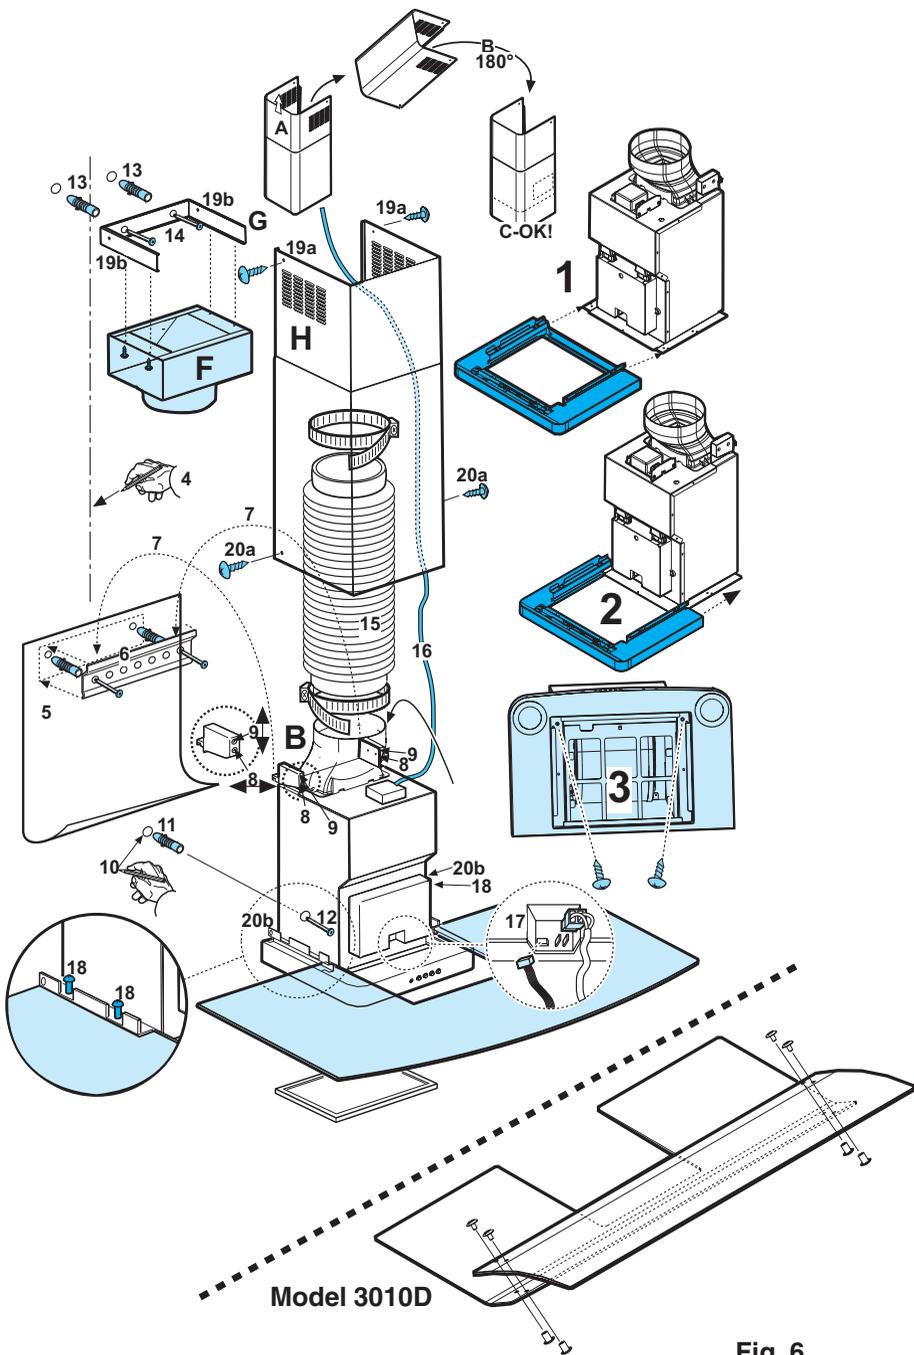


Fig. 6

**AEG Hausgeräte GmbH  
Postfach 1036  
D-90327 Nürnberg**

**<http://www.aeg.hausgeraete.de>**

**© Copyright by AEG**

**L11M7B Ed. 05/01**